


McKissick® Tapered Bearing Sheaves

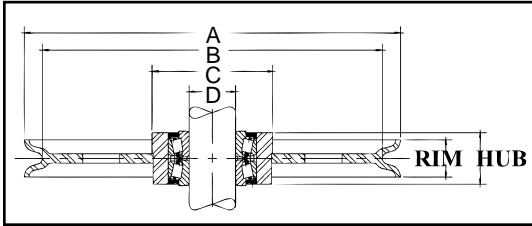

**SEE APPLICATION AND
WARNING INFORMATION**

Para Español: www.thecrosbygroup.com

on Pages 375-382

Tapered Bearing Sheaves

- Roll-Forged™ sheaves are available in sizes up to 78" in diameter.
- Tapered Bearing Sheaves are designed to operate on shafts machined to +/- .0005 of the indicated shaft size.
- Applications should provide for tightening separator plates against bearing cones to adjust and insure proper function of bearing.
- For sizes not listed, McKissick® Finished Bore Sheaves can be equipped with tapered bearing at an optional charge.

"A" Nominal Outside Diameter (in.)	Stock Number	Pattern Number	Wire Line Size (in.)	"D" Shaft Size (in.)	Hub Width (in.)	Rim Width (in.)	"C" Nominal Hub Outside Diameter (in.)	"B" Nominal Tread Diameter (in.)	Material	Approx. Weight (lbs.)
4-7/8	480269	5-1	3/8	.749	1-3/8	1-1/8	2-1/4	4-1/16	F.S.	3.60
7	480777	7-1	1/4	.749	1-3/8	3/4	2-3/8	6-1/4	B.S.	9.00
8	481017	8-2	1/2	.749	1-3/8	1-1/4	2-7/16	6-5/8	F.S.	7.00
8-1/2	481044	8DI-8	3/8	.749	1-3/8	1	2-3/4	7-1/2	D.I.	7.50
9-3/4	481295	10-NS-3	3/8	1.499	2-5/16	1	3-3/4	8-3/4	F.S.	11.20
11-7/8	481552	12-6	1/4	1.499	2-5/16	1	3-3/4	10-3/4	D.I.	12.0
12	481455	12-2-A	3/4	1.499	2-5/16	2-3/16	4-1/2	9-3/4	R.F.	24.0
12	481446	12-2-A	7/8	1.499	2-5/16	2-3/16	4-1/2	10-1/4	R.F.	24.0
16	4302793	16-4	1/2	1.998	2-15/16	2-1/2	5-3/4	14-1/4	R.F.	50.0
16	4300599	16-4	3/4	1.998	2-15/16	2-1/2	5-3/4	13-3/8	R.F.	55.0
16	4300018	16-5	7/8	1.499	2-5/16	2-3/16	4-1/2	12-15/16	R.F.	37.0
16	4300054	16-17-B	1	1.998	2-15/16	2-1/2	5-3/4	13-3/8	R.F.	42.0
18	4300081	18-2	3/4	1.998	2-15/16	2-3/16	6-1/2	16	R.F.	40.0
20	**4302524	20-5	5/16	1.998	2-15/16	1-3/8	5-3/4	18-7/8	R.F.	54.0
20	4300161	20-2	3/4	1.998	2-15/16	2-1/8	6-1/2	18	R.F.	87.0
20	4300189	20-2	1	1.998	2-15/16	2-1/8	6-1/2	16-1/2	R.F.	84.0
24	4301721	24TS-8	9/16	4.248	3-1/2	3-1/8	8	22	R.F.	125
24	**4302720	24-5	5/8	2.755	2-15/16	1-1/2	6-1/2	21-3/4	R.F.	136
24	4300312	24TS-8	7/8	4.248	3-1/2	3-1/8	8	20-7/8	R.F.	125
24	4300321	24TS-8	1	4.248	3-1/2	3-1/8	7-5/8	21-1/8	R.F.	125
24	4300401	24TS8-2	1-1/8	2.755	2-15/16	2-3/4	6-1/2	20-1/16	R.F.	80.0
24	4300330	24TS-8	1-1/8	4.248	3-1/2	3-1/8	8	20-1/16	R.F.	125
24	4300269	24-10	1-1/2	4.248	3-1/2	3-1/8	8-1/4	20	R.F.	125
30	4300483	48T8-B	7/8	4.248	3-1/2	3-1/8	8	27	R.F.	140
30	4300492	48T8-B	1	4.248	3-1/2	3-1/8	7-5/8	27	R.F.	210
30	4300526	48T8-B	1	5.624	3-11/16	3-1/8	9-1/2	27	R.F.	190
30	4300508	48T8-B	1-1/8	4.248	3-1/2	3-1/8	8	27	R.F.	140
30	4300535	48T8-B	1-1/8	5.624	3-11/16	3-1/8	9-1/2	26-3/8	R.F.	140
30	4300704	48T8-B	1-1/4	5.624	3-11/16	3-1/8	9-1/2	26-3/8	R.F.	140

* Without Flame Hardening.

Material: B.S.=Bar Steel, C.I.=Cast Iron, F.S.=Forged Steel, D.I.=Ductile Iron, C.S.=Cast Steel, P.M.=Powdered Metal, R.F.=Roll-Forged™.

McKissick® Roll-Forged™ sheaves highlighted above in bold italic are available with reduced lead times due to our advanced manufacturing process.

Custom sheaves are available. See page 281 for ordering details.